


CRITICAL DIMENSION CHART

| MARK | DESCRIPTION | FORMULA | DIMENSION |
|------|--------------------------|--------------|-----------|
| A | CLEAR OPENING | A | - |
| B | POST SPACING C/C | B | - |
| C | OVERALL GATE LENGTH | A + 1-4" | - |
| D | GATE FRAME HEIGHT | F - 3" | - |
| E | LOWER FRAME HEIGHT | E | - |
| F | CLEAR OPENING HEIGHT | F | - |
| G | HEIGHT TO BOTTOM OF BEAM | G | - |
| H | POST HEIGHT | H | - |
| I | FABRIC HEIGHT | E - 1-0" | - |
| J | OVERALL BEAM LENGTH | A X 2 + 1-4" | - |



NOTES
 1. ALL FITTINGS STANDARDLY PROVIDED FOR 4" O.D. POSTS.
 OTHER SIZES AVAILABLE UPON REQUEST.
 2. BARB ARMS (FOR BARBED WIRE) OPTIONAL.

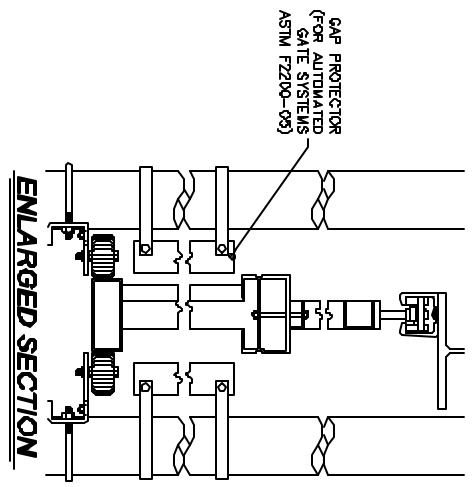

TYMETAL CORP.
 www.tymetal.com

2549 STATE ROUTE 40
 GREENWICH, N.Y. 12834

PH: (800) 228-4283 - FX: (518) 682-9404

HEAVY DUTY OVERHEAD SLIDE GATE