

TYM-VS2 SERIES SLIDE GATE OPERATOR SPECIFICATIONS

Model	HP	Voltage & Phase	Drive Type	Gate Weight	Gate Opening	Gate Speed	Maximum Cycles
TYM-VS2-1	1	208V / 230V 1Ph	#50 chain	2500 lbs	Up to 78 ft	Variable, up to 2 ft/sec	Continuous Duty
		208V / 230V / 460V 3Ph					

APeX Controller

- UL325/UL991 compliant 24VDC control module
- Full featured for access control, security, and entrapment protection
- Integral MegaCode receiver
- On-board 3-button station

Heavy Duty Braking

- Double c-face, dual disk electromagnetic brake

Heavy Duty Components

- Adjustable torque-limiter and heavy-duty pillow block bearings for smooth, reliable, quiet power transmission
- All models are rated for continuous duty

Variable Drive Speed

- Programmable variable speed controller for smooth gate operation and high gate speed.
- Soft start/stop programmable

Manual Hand Crank

- Crank handle can be folded out and used for emergency manual operation to crank the gate open and closed

Weather Resistant Cabinet

- Galvannealed steel cabinet with powdercoated finish. Removable front cover is hinged, gasketed, and lockable

Standard Convenience Features

- Power on/off button
- Exterior stop/reset button

Direct C-Face Motor-Brake-Gear Box Drive

- Designed for smooth and dependable power transmission




ELECTRICAL

- Diagnostic LED display for ease of setup and troubleshooting
- 1 HP industrial, continuous duty, 1& 3 phase 56 frame motors
- Integral entrapment sensing system with digital set point for accurate adjustment and enhanced safety
- Built-in dual gate capability using 3-wire shielded cable
- 24V DC power available for access control accessories
- Continuous-tone entrapment alarm with reset button
- Integrated warning beeper during gate movement

MECHANICAL

- Heavy duty 15:1 right angle C-face gear reducer
- #50 roller chain and sprockets
- Heavy duty steel chassis
- Heavy duty pillow-block bearings
- Adjustable torque limiter

Dimensions

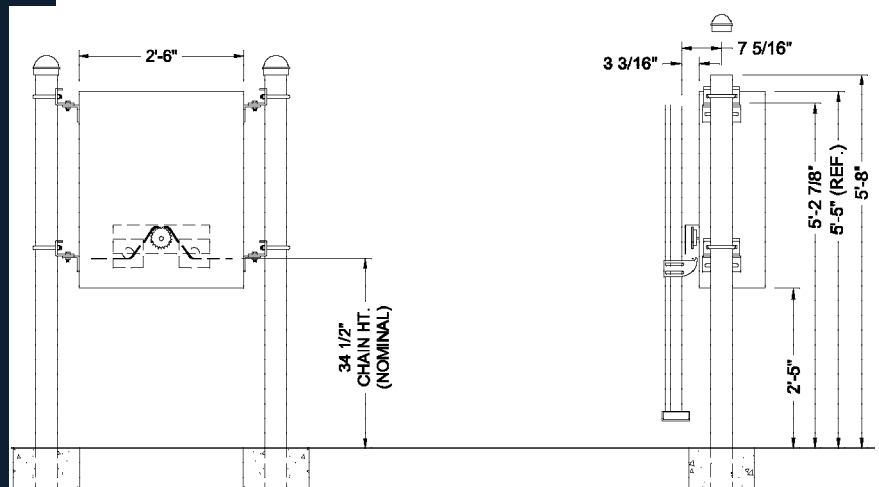

CAUTIONS



- Automatic gates not for pedestrians
- Automatic gate operators are designed for vehicular traffic only; operators are powerful and can cause serious injury or death; **DIRECT ALL PEDESTRIAN TRAFFIC TO SEPARATE PEDESTRIAN GATE**
- UL 325 requires use of contact or non-contact anti-entrapment devices
- ASTM F2200 requires that all exposed rollers are covered

Tymetal Corp.

(800) 328-GATE (4283) • www.tymetal.com
Greenwich, NY • Pearland, TX

