
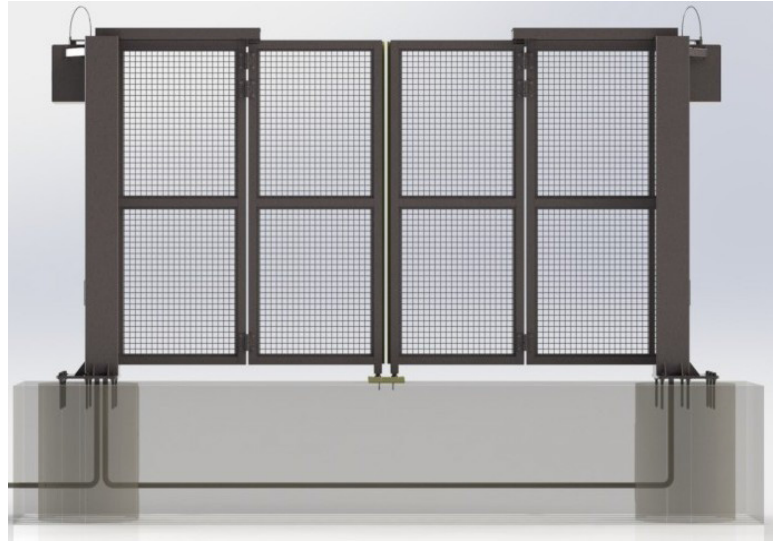


SecurFold Trackless Bi-Folding Speed Gate

"We Close Openings"

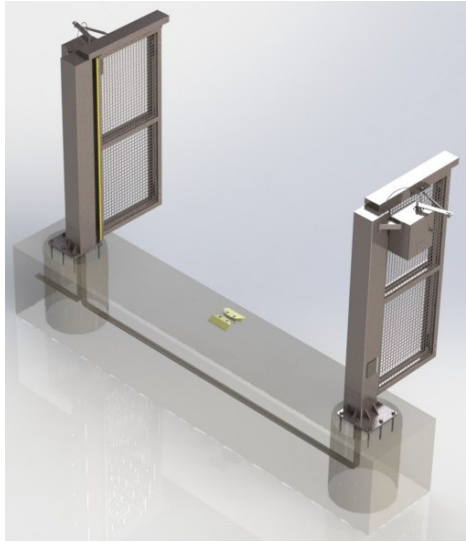

Tymetal Corp.'s SecurFold Trackless Bi-Folding Speed Gate system is the ideal system for perimeter security access. The Trackless gate systems require very little maintenance and provide high cycle durability, even in the harshest conditions.

SPEED

- For clear openings up to 16' wide, gate opens in under 7 seconds
- Faster access than conventional sliding cantilevered gate


FEATURES

- Convenient operator access
- Manual release for easy manual operation (available with high security locking access cover)
- UL325 Compliant
- Independently 200,000 Cycle Certified (ISO 17025)

**High Speed,
High Cycle**

"We Close Openings"

Plan View

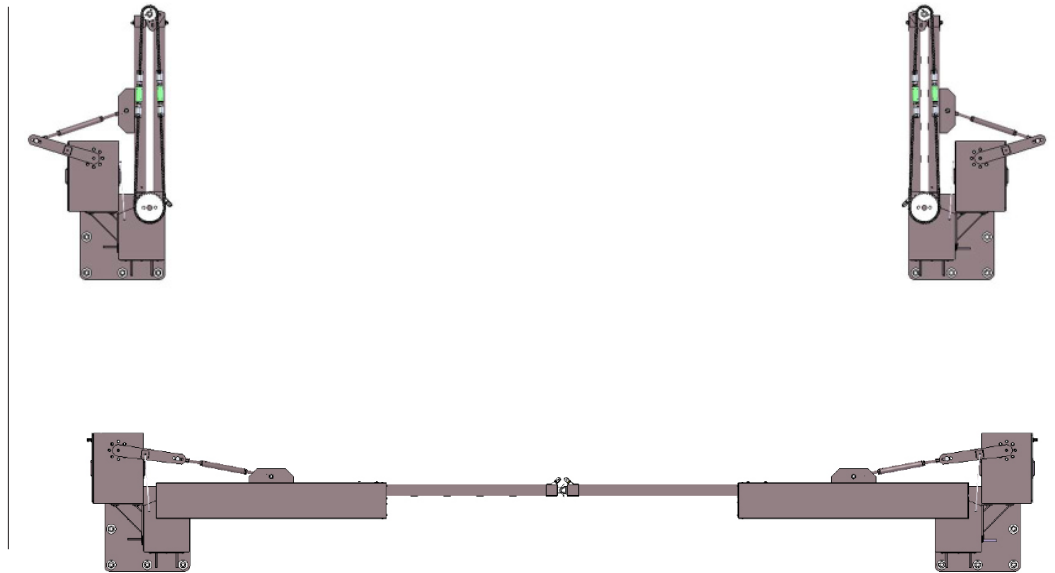

DESIGN

- Openings up to 16' standard; Custom up to 20'
- Free standing column with column mounted operators
- Unlimited headroom clearance
- Minimal moving parts and smaller operational space required compared to a conventional sliding cantilevered gate
- Panel Design Options:
 - Galvanized woven mesh
 - Vertical bar grills
 - Louvers
 - Custom colors and options available!
- Control inputs for:
 - Safety devices
 - Loop detectors
 - Card readers
 - Other access devices

**Design Flexibility and
Custom Options**