

STRUCTURAL CANTILEVER SLIDE GATE



VERSATILE STRENGTH

For larger clear openings, this dual track version of our TYMETAL Cantilever Slide Gate is supported by four posts. It is suitable for closing single clear opening widths up to 40 feet.

This gate also featuers enclosed tracks and a ball bearing wheel system that has been rigorously tested.

CLOSE SINGLE CLEAR OPENINGS UP TO 40'

DURABLE



Fabricated by AWS Certified Welders using TYMETAL's various proprietary aluminum extrusions to build a gate frame that is twice as strong as our competition's.

COMPLIANT



All TYMETAL Cantilever Slide Gate Systems comply with the latest industry safety standards (UL 325 and ASTM F2200).



TESTED

Engineered gate panels, matched operators, and access controls are designed and tested as complete systems to perform flawlessly in all weather.

STRONG & LIGHT




An aluminum construction and smooth rollers, with the addition of a second keyed track extrusion provided additional rigidity against lateral forces.



FEATURES AND BENEFITS

- Closes single openings up to 40'
- Closes double/bi-parting openings up to 80'
- Fabricated from aluminum alloy extrusions
- Separate semi-enclosed double tracks of extruded aluminum alloy
- Supported by two tracks of self-aligning, 4-wheeled, sealed lubricant ball bearing truck assemblies
- Infill alternatives include chain link, ornamental picket, and custom configurations
- Adjustable diagonal 1/4" cables provide zero to minimal deflection

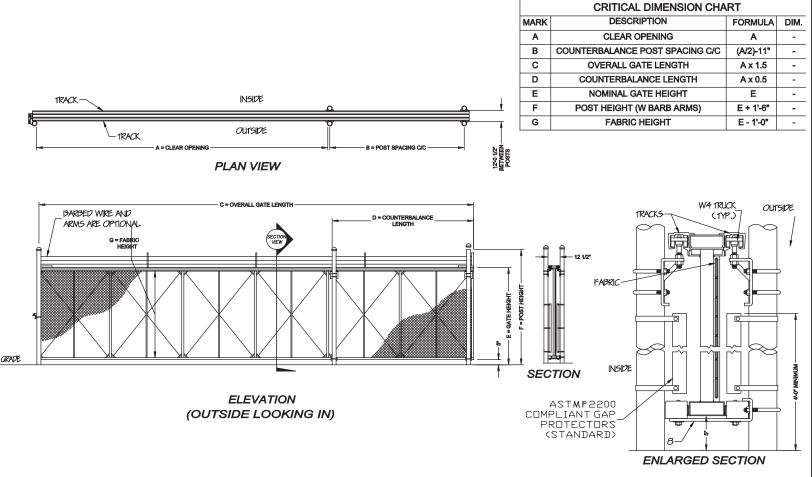

NOTE: STANDARD HEIGHTS UP TO 8'-0". FOR HEIGHTS ABOVE 8' CONTACT MANUFACTURER.

For more information on our Structural Cantilever Slide Gate Contact TYMETAL at 1.800.328.GATE (4283)

678 Wilbur Avenue Greenwich, NY 12834 4501 Dixie Farm Road Pearland, TX 77581

