

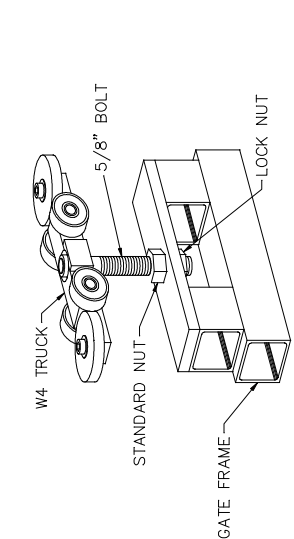
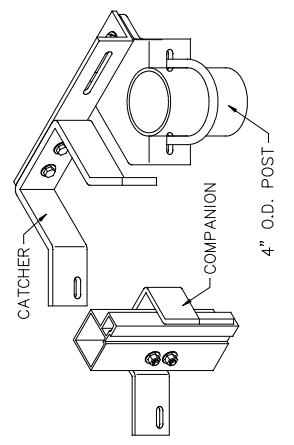




CRITICAL DIMENSION CHART			
MARK	DESCRIPTION	FORMULA	DIMENSION
A	CLEAR OPENING	A *	UP TO 40'
B	POST SPACING C/C	A + 4"	
C	UPPER GATE FRAME WIDTH	A + 1'-4"	
D	BOTTOM GATE FRAME WIDTH	A + 5' MIN.	
E	CLEAR OPENING HEIGHT	E **	UP TO 16'
F	POST HEIGHT	E + 1'-6"	
G	OVERALL BEAM LENGTH	A X 2 + 1'-0"	

* A: SEE NOTE 5.

** E: CONTACT MANUFACTURER FOR HEIGHTS GREATER THAN 16'.

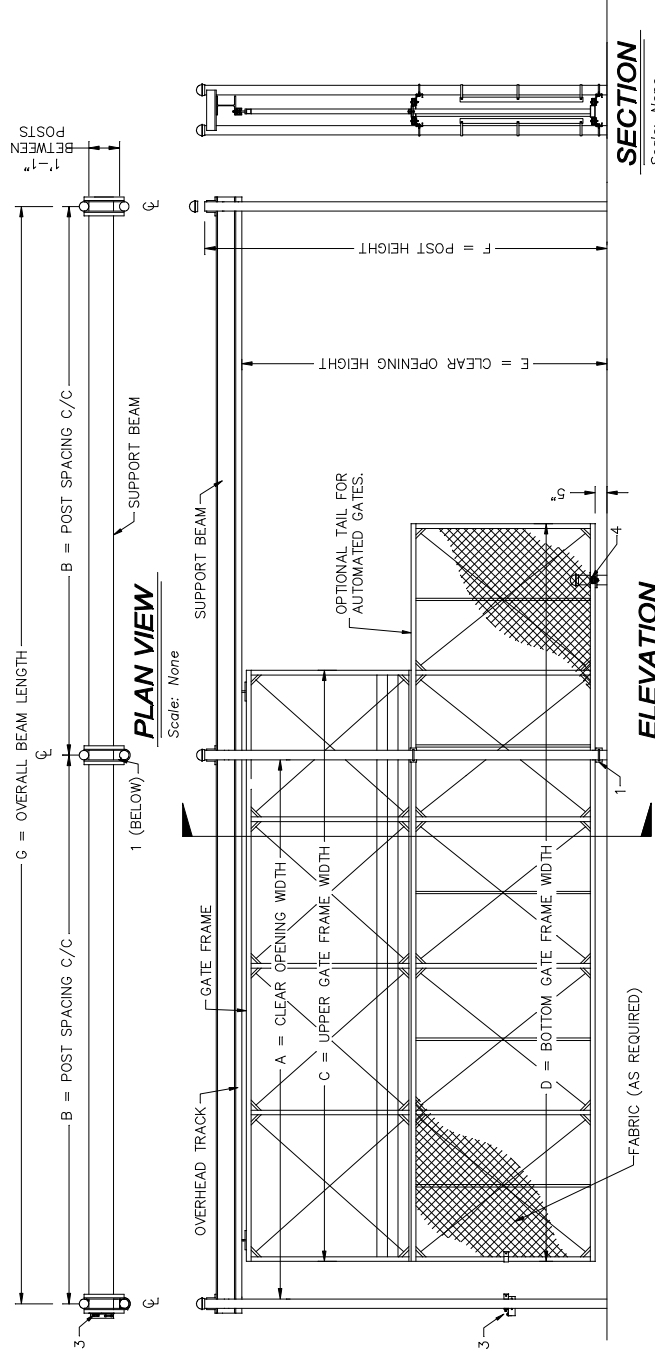

- NOTES:**
- ALL FITTINGS STANDARDLY PROVIDED FOR 4" O.D. POSTS. OTHER SIZES AVAILABLE UPON REQUEST.
 - BARB ARMS (FOR BARBED WIRE) OPTIONAL.
 - HIGH WIND PACKAGE AVAILABLE. CONTACT MANUFACTURER RELATIVE TO HIGH WIND CONDITIONS.
 - FOR IN-FILL MATERIALS OTHER THAN CHAIN LINK CONTACT MANUFACTURER.
 - CLEAR OPENINGS (A) UP TO 40 FEET. APPROPRIATELY SIZED "W" BEAMS WILL BE UTILIZED. FOR CLEAR OPENING GREATER THAN 40' (UP TO 53') ENGINEERED BEAMS WILL BE UTILIZED.

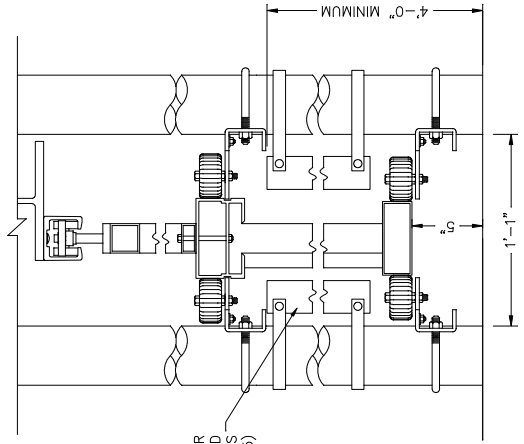

678 WILBUR AVENUE
GREENWICH, N.Y. 12834
PH: (800) 328-4283 - (518) 692-9930
www.tymetal.com

REV. 2 9/23/25

4 UNIVERSAL BOTTOM GUIDE
Scale: None

HEAVY DUTY OVERHEAD SLIDE GATE