

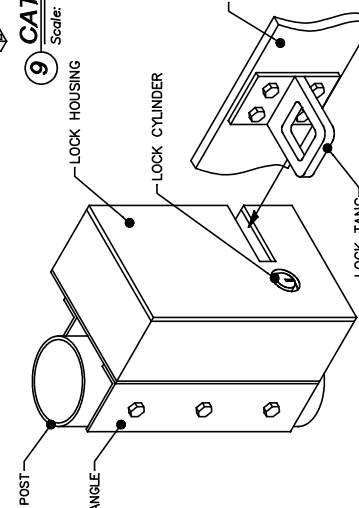
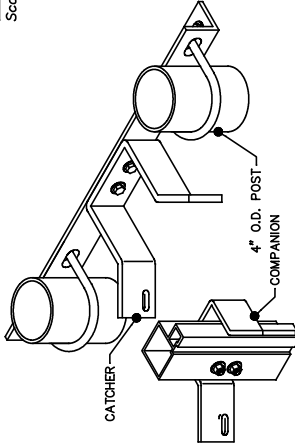
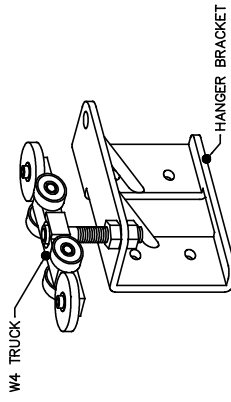
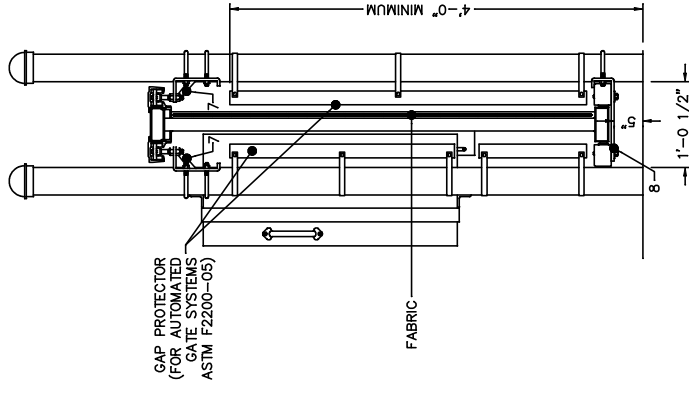
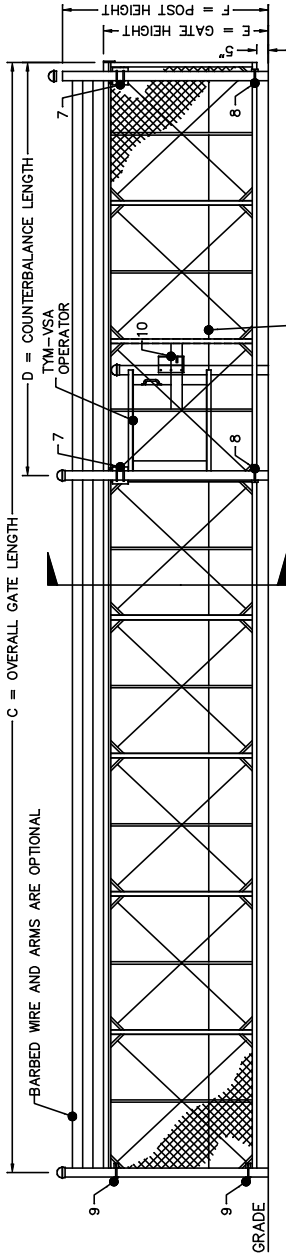


CRITICAL DIMENSION CHART

MARK	DESCRIPTION	FORMULA	DIM.
A	CLEAR OPENING	A	-
B	COUNTERBALANCE POST SPACING C/C	$(A/2)-11"$	-
C	OVERALL GATE LENGTH	$A \times 1.5$	-
D	COUNTERBALANCE LENGTH	$A \times 0.5$	-
E	NOMINAL GATE HEIGHT	E	-
F	POST HEIGHT (W BARB ARMS)	$E + 1'-6"$	-
G	FABRIC HEIGHT	$E - 1'-0"$	-

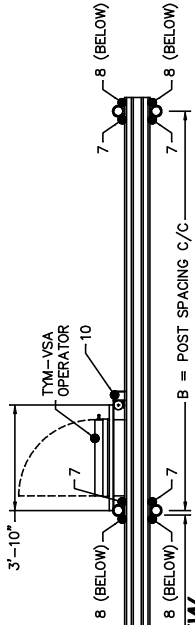

- NOTES:**
- FOR COMPLETE INFORMATION ON THE TYM-VS OPERATOR VISIT THE "GATE OPERATORS" SECTION OF THE WEB SITE.
 - ALL FITTINGS STANDARDLY PROVIDED FOR 4" O.D. POSTS. OTHER SIZES AVAILABLE UPON REQUEST.
 - BARB ARMS (FOR BARBED WIRE) OPTIONAL.

NOTE: 1050D LOCK REQUIRES SEPERATE 115V POWER SUPPLY.

TYMETAL CORP.
www.tymetal.com

678 WILBER AVENUE
GREENWICH, N.Y. 12834
PH: (800) 328-4283 - FX: (518) 692-9404

TIGER (TYM-VSA SECURITY) GATE SYSTEM
(WITH STRUCTURAL GATE - CHAIN LINK)